


Assembly Instructions

ITEM NO: 31135

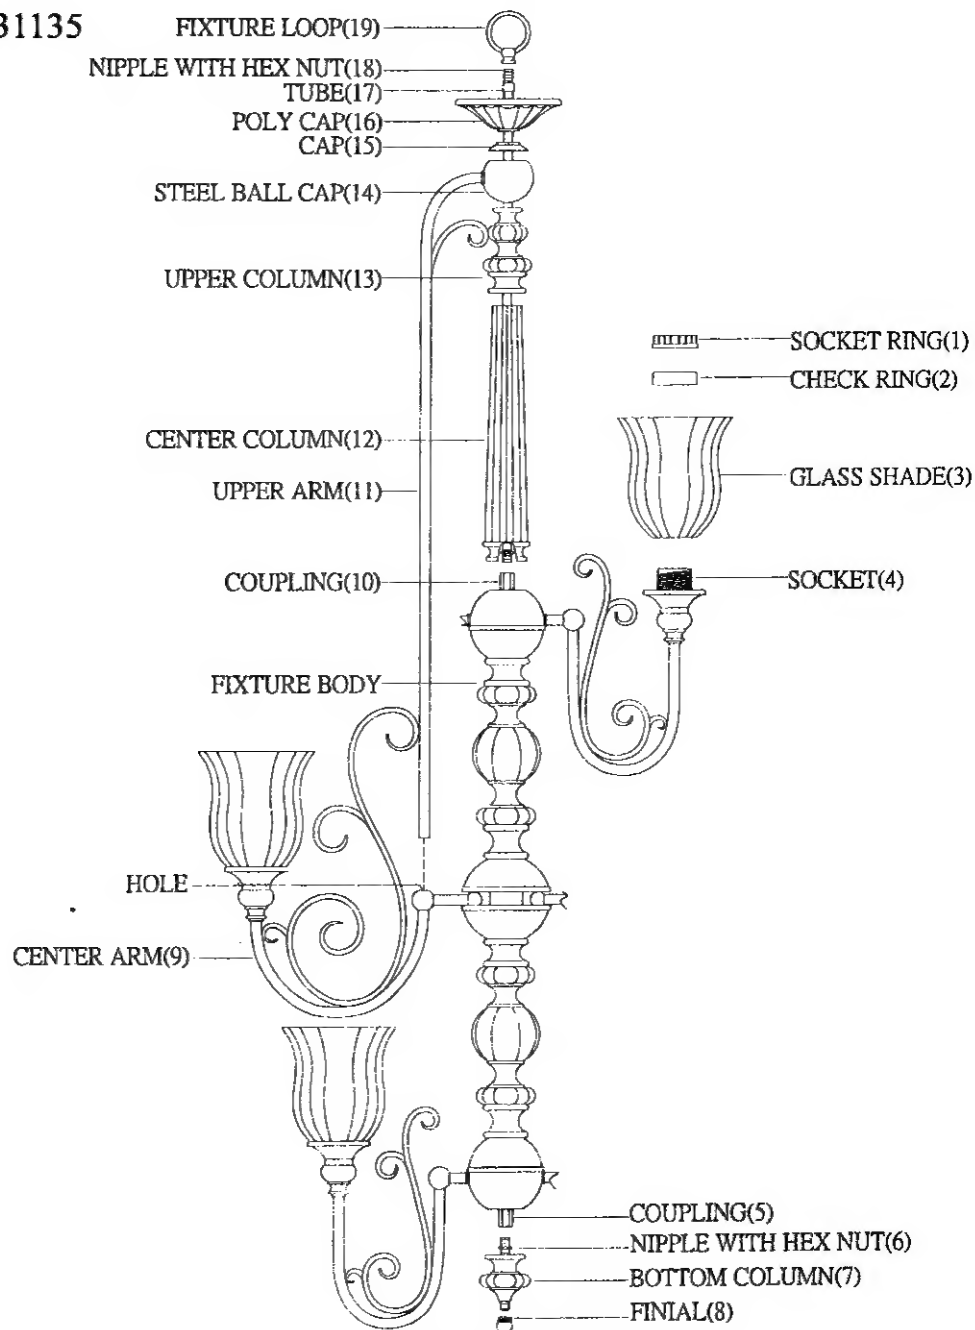

1. Carefully remove the fixture out of the carton, and check that all the parts are included referring to the above illustration. Make sure not to misplace any parts that are needed for the installation;
2. Thread nipple with hex nut(18) into coupling(11);
3. Install the center column(12), upper column(13), steel ball cap(14) onto nipple with hex nut(18), then adjust the center arm(9) to its proper position; then slide the upper arm(13) into hole of the center arm(9);
4. Install the cap(15), poly cap(16), tube(17), onto nipple with hex nut(18), and secure them with fixture loop(19);
5. Screw the nipple with hex nut(6) into the coupling(5) then slide bottom column(7) onto nipple with hex nut(6), then secure them with finial(8);
6. Put the glass shade(2), check ring(3) onto socket(1), and secure them with socket ring(4);
7. The fixture is ready for lamping and installation!